Coating & Dispensing

FEATURES

- Full colour touch screen display

- Highest grade HEPA and carbon technology

- Automatic electronic flow control - maintains a constant extraction rate even as the filter blocks

- Gas and particle sensors to warn the operator

- Operate worldwide with no loss of performance

SPECIFICATIONS

Voltage	**90v - 254v**
Part Number	**1704032**
Wattage	1.1kW
Frequency	50Hz / 60Hz
Cabinet Height	1070mm
Cabinet Width	528mm
Cabinet Depth	465mm
Cabinet Weight	60Kg
Sound Level	<60dBa
Airflow	400m3/h

INCLUDED AS STANDARD...

FILTERS

Main Filter
Code
113508

Description
Chemical

Pre-filter
Code
111097

Description
F8/F9 Labyrinth

CONNECTION KIT

Connection kit is included see overleaf for options

Find out more:

🌐 **www.purex.co.uk**

✉️ **purex@purex.co.uk**

📞 **+44 (0)1405 746030**

Machine Supplied With • 1 x Main Filter • 1 x Pre-filter • 1 x Connection Kit • 1 x Power Cable • 1 x Manual

OPTIONS

Main Filter

Code:	Description:
113505H	HEPA/Chemical (Hydrophobic)
113579	HEPA/Twin Chemical
113668	HEPA/Twin Chemical
113512	HEPA/Chemical (Cleanroom)
113669	HEPA/Chemical (Cleanroom)
113508	Chemical
113809	HEPA
113513	Solvent Lock

Main Filter

Code:	Description:
113662	Chemical Special
113505P	Chemical Special
113531	Pleated Bag

Pre-filter

Code:	Description:
200524	F8/F9 Pad

Connection Kits

	Hose End Diameter	Hose Length	Purex Inlet Diameter

Code: 100032 | 50mm | 3m | 80mm

Connect to 50mm diameter pipe/port or Purex valve

3.0m
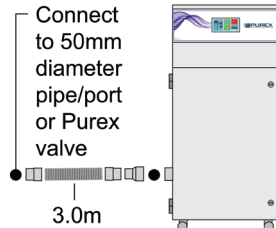
Code: 100043 | 50mm | 6m | 80mm

Connect to 50mm diameter pipe/port or Purex valve

6.0m
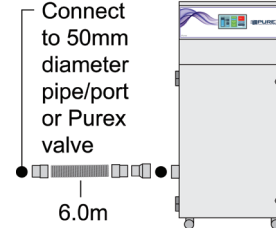
Code: 120299 | 80mm | 3m | 80mm

Connect to 80mm diameter pipe/port

3.0m

Code: 120288 | 100mm | 2.3m | 80mm

Connect to 100mm diameter pipe/port

0.3m   2.0m
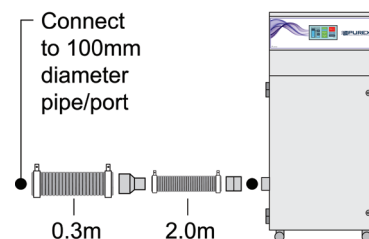
Code: 120297 | 100mm | 2m | 80mm

2.0m

Connect to 100mm diameter pipe/port

2.0m
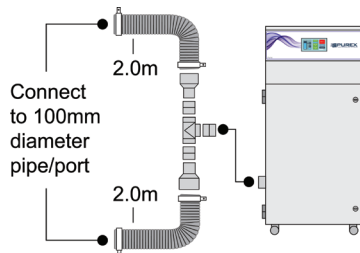
Code: 100171 | 125mm | 3m | 80mm

Connect to 125mm diameter pipe/port

3.0m
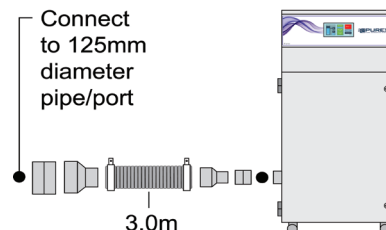
If you do not see a connection kit that fits your machine or pipework, please contact Purex or your representative

Interfacing

Your Machine — 10011010 / 10011010 — Extractor

Interfacing can remotely start the Purex machine when the connected machine starts.

Interfacing can also warn the connected machine when the Purex machine is in alarm.

Take a look through our Interfacing Guide to see our extensive range of options

PUREX
FUME EXTRACTION SYSTEMS

Purex International Limited
QWP House, Island Drive
Capitol Park, Thorne
Doncaster, UK
DN8 5UE