XBASE 400



The Future of Fume Extraction



FEATURES

- VariColour filter blocked warning system
- Highest grade HEPA and carbon technology
- Automatic electronic flow control maintains a constant extraction rate even as the filter blocks
- Quiet in operation
- · Simple to install and easy to relocate

INCLUDED AS STANDARD...



- Main Filter Code 110545
- **Description** HEPA/Chemical



Pre-filter Code

111108

Description F8/F9 Labyrinth

CONNECTION KIT

Connection kit is included see overleaf for options

SPECIFICATIONS

Voltage	120v	230v	
Part Number	0AL4107	0AL4104	
Wattage	0.26kW	0.25kW	
Frequency	50Hz / 60Hz	50Hz / 60Hz	
Cabinet Height	705mm	705mm	
Cabinet Width	707mm	707mm	
Cabinet Depth	691mm	691mm	
Cabinet Weight	80kg	80 kg	
Sound Level	<60dBa	<60dBa	
Airflow	400m3/h	400m3/h	

Find out more:



🕑 +44 (0)1405 746030


OPTIONS

Main Filter	
Code:	Description:
113585	HEPA/Chemical Special

Connection Kits


Hose End Hose Purex Inlet Diameter Length Diameter

Code: 100032	50mm	3m	80mm	Code: 120293	80mm	1.3m	80mm
Conr to 50 diam pipe/ or Pu valve 3.0	lmm eter port urex e ■□□□● e			diar pipe • (jiii	nnect Omm neter e/port 1.3m		

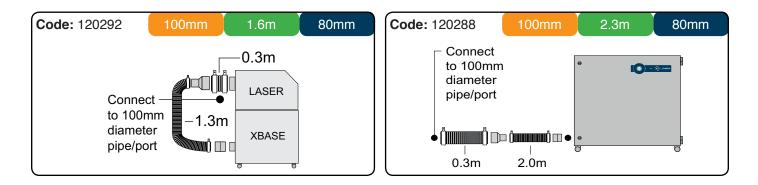

If you do not see a connection kit that fits your machine or pipework, please contact Purex or your representative

Interfacing



Interfacing can remotely start the Purex machine when the connected machine starts.

Interfacing can also warn the connected machine when the Purex machine is in alarm.

Take a look through our Interfacing Guide to see our extensive range of options



Purex International Limited QWP House, Island Drive Capitol Park, Thorne Doncaster, UK DN8 5UE

Registered Office: Purex International Limited, QWP House, Island Drive, Capitol Park, Thorne, Doncaster DN8 5UE Registered No. 5136616 England | VAT No. GB842 5025 49 | WEEE Producer Registration Number: WEE/CE0067T